



### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7:

(11) International Publication Number:

WO 00/57942

A61M 16/06, A61B 9/00, 18/08

A1

(43) International Publication Date:

5 October 2000 (05.10.00)

(21) International Application Number:

PCT/AU00/00260

(22) International Filing Date:

29 March 2000 (29.03.00)

(30) Priority Data:

PP 9499

29 March 1999 (29.03.99)

ΑU

(71) Applicant (for all designated States except US): RESMED LIMITED [AU/AU]; 97 Waterloo Road, North Ryde, NSW 2113 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): GUNARATNAM, Michael, Kassipillai [AU/AU]; 3 Keiley Street, Marsfield, NSW 2122


(74) Agent: SPRUSON & FERGUSON; G.P.O. Box 3898, Sydney, NSW 2001 (AU).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL. IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: FOREHEAD SUPPORT FOR A FACIAL MASK

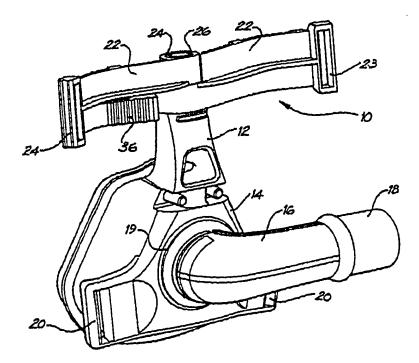

(57) Abstract

A forehead support (10) for a respiratory mask (14). The forehead support (10) includes a pair of arms (22). The arms (22) are each adapted to locate a forehead cushion (30). The arms (22) are also adapted to pivot relative to each other. The arms (22) are also selectively lockable at two or more angular positions relative to each other. The forehead support (10) can thus be adjusted to suit the facial topography of the wearer of the respiratory mask (14).

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑÜ	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Мопасо	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	T.I	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
Cĭ	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		···
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ .	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanko	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5

10

15

20

25

30

# FOREHEAD SUPPORT FOR A FACIAL MASK

### FIELD OF THE INVENTION

The present invention relates to a forehead support for a facial mask used to supply breathable gas to a wearer's airways.

The invention has been developed primarily for use in supporting a nasal mask used in Continuous Positive Airway Pressure (CPAP) treatment of, for example, Obstructive Sleep Apnea (OSA) and other ventilatory assistance treatments such as Non-Invasive Positive Pressure Ventilation (NIPPV) and will be described hereinafter with reference to this application. However, it will be appreciated that the invention is not limited to these particular uses and is also suitable for use with, for example, full-face (ie. nose and mouth) masks.

## BACKGROUND TO THE INVENTION

CPAP treatment is a common emeliorative treatment for breathing disorders including OSA. CPAP treatment, as described in US Patent No. 4,944,310, provides pressurised air or other breathable gas to the entrance of a patient's airways at a pressure elevated above atmospheric pressure, typically in the range 4-20cm H<sub>2</sub>O.

It is also known for the level of treatment pressure to vary during a period of treatment in accordance with patient need, that form of CPAP being known as automatically adjusting nasal CPAP treatment, as described in US Patent No. 5,245,995.

NIPPV is another form of treatment for breathing disorders which can involve a relatively higher pressure of gas being provided in the patient mask during the inspiratory phase of respiration and a relatively lower pressure or atmospheric pressure being provided in the patient mask during the expiratory phase of respiration.

In other NIPPV modes the pressure can be made to vary in a complex manner throughout the respiratory cycle. For example, the pressure at the mask during inspiration or expiration can be varied through the period of treatment.

Typically, the ventilatory assistance for CPAP or NIPPV treatment is delivered to the patient by way of a nasal mask. Alternatively, a mouth mask or full face mask or nasal prongs can be used. In this specification any reference to a mask is to be understood as incorporating a reference to a nasal mask, mouth mask, full face mask or nasal prongs.

In this specification any reference to CPAP treatment is to be understood as embracing all of the above described forms of ventilatory treatment or assistance.

PCT/AU00/00260

-2-

A CPAP apparatus broadly comprises a flow generator constituted by a continuous source of air or other breathable gas such as a hospital piped supply or a blower. In the latter case, an electric motor drives the blower and is typically controlled by a servo-controller under the control of a microcontroller unit. In either case, the gas supply is connected to a conduit or tube which in turn is connected to a patient nasal or full-face mask which incorporates, or has in close proximity, an exhaust to atmosphere for venting exhaled gases. Examples of prior art nasal masks are shown in U.S. Patent Nos. 4,782,832 and 5,243,971.

The supply conduit delivers gas into a chamber formed by walls of the mask. The mask is normally secured to the wearer's head by straps. The straps are adjusted to pull the mask against the face with sufficient force to achieve a gas tight seal between the mask and the wearer's face.

A problem that arises with the use of the existing masks is that in order for the straps to be tight, the mask is compressed against the wearer's face and may push unduly hard on the wearer's nose. Additionally, the mask may move around the wearer's face. Thus, there has been hitherto provided a forehead support, which provides a support mechanism between the mask and the forehead. This forehead support prevents both the mask from pushing too strongly against the wearer's nose and/or facial region as well as minimising movement of the mask with the addition of a contact point between the mask and the wearer's head thereby reducing uncomfortable pressure points. Additionally, the forehead support can be arranged to prevent the gas supply conduit from contacting the wearer's forehead or face.

Forehead supports with a single cushion and a single contact point or the forehead are known.

The applicant's U.S. Patent Application Serial No. 09/008,708 relates to a substantially rigid one-piece forehead support having a pair of forehead cushions mounted at each outer end of the support. This forehead support is connected to the top of a facial mask and includes an adjustable mechanism to allow the spacing between the top of the facial mask and the forehead support to be altered between predetermined positions to thereby alter the angle of the mask relative to the wearer's head to suit the wearer's facial topography.

It is an object of the present invention to provide an alternate form of forehead support.

5

10

15

20

25

30

10

15

20

25

30

# SUMMARY OF THE INVENTION

Accordingly, in a first aspect, the present invention provides a forehead support for a respiratory mask, said forehead support including a pair of arms, wherein: the arms are each adapted to locate a forehead cushion; the arms are adapted to pivot relative to each other; and the arms are selectively lockable at two or more angular positions relative to each other.

In a second aspect, the present invention provides a respiratory mask assembly comprising a respiratory mask and a forehead support, said forehead support including a pair of arms, wherein: the arms are each adapted to locate a forehead cushion; the arms are adapted to pivot relative to each other; and the arms are selectively lockable at two or more angular positions relative to each other.

As the angle between the arms adjacent to wearer's forehead is decreased or increased the distance between the forehead and the extension of the respiratory mask is increased or decreased respectively, thereby altering the angle of the respiratory mask relative to the wearer's face.

The arms are preferably also adapted to each pivot relative to the respiratory mask.

Preferably, each of the arms include a cylindrical recess adapted to pivotally receive a cylindrical boss provided on the respiratory mask.

The respiratory mask preferably includes an extension adjacent and above, in use, the wearer's nose on which the cylindrical boss is provided.

Desirably, one of the arms includes a tongue adapted to be received in one of at least two grooves provided on the other of the arms so as to lock the arms at one of two or more predetermined said angular positions.

The tongue is preferably provided on a flexible member which is adapted to permit the tongue be moved out of engagement with the grooves by manual manipulation of the member.

The forehead cushions are desirably located on the outer ends of the arms.

The arms preferably also include means to connect a head strap thereto.

The respiratory mask preferably also includes means to connect a head strap thereto.

# BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described, by way of examples only, with reference to the accompanying drawings in which:

WO 00/57942 PCT/AU00/00260

-4-

Fig. 1 is a front perspective view of a first embodiment of a forehead support according to the invention connected to a nasal mask;

- Fig. 2 is an underside view of the forehead support shown in Fig. 1 with the tongue of one arm free of engagement with the grooves of the other arm;
- Fig. 3 is an underside view of the forehead support shown in Fig. 1 with the tongue and groove engaged at the first of four positions;

5

10

15

20

25

30

35

- Fig. 4 is an underside view of the forehead support shown in Fig. 1 with the tongue and groove engaged in the second of four positions;
- Fig. 5 is an underside view of the forehead support shown in Fig. 1 with the tongue and groove engaged at the third of four positions;
- Fig. 6 is an underside view of the forehead support shown in Fig. 1 with the tongue and groove engaged at the fourth of four positions;
- Fig. 7 is an underside view of a second embodiment of the forehead support according to the invention with the tongue of one arm free of engagement with the grooves of the other arm;
- Fig. 8 is an underside view of the forehead support shown in Fig. 7 with the tongue and groove engaged at the first of four positions;
- Fig. 9 is an underside view of the forehead support shown in Fig. 7 with the tongue and groove engaged at the second of four positions;
- Fig. 10 is an underside view of the forehead support shown in Fig. 7 with the tongue and groove engaged at the third of four positions;
- Fig. 11 is an underside view of the forehead support shown in Fig. 7 with the tongue and groove engaged at the fourth of four positions;
  - Fig. 12 is an upper perspective view of the forehead support shown in Fig. 7; and
- Fig. 13 is an lower perspective view of the forehead support shown in Fig. 7.

# DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 1 to 6 show a first embodiment of a forehead support 10 according to the present invention. As shown in Fig. 1, the forehead support 10 is adapted for connection to an extension 12 of a facial respiratory mask 14 used to supply breathable gas to a wearer's airways. The mask 14 includes an angled connector 16 which has a distal end 18 for connection to a gas supply conduit (not shown) and a proximal end 19 for connection to the mask 14. The connector 16 communicates the supplied gas from the gas supply conduit to the interior of the mask 14.

The extension 12 is positioned on top of the nasal mask 14 generally adjacent and above the wearer's nose. It will be appreciated that this is just one example of a

WO 00/57942 PCT/AU00/00260

-5-

facial mask that could be supported by the forehead support 10. For example, the forehead support also finds application in supporting full-face (ie. nose and mouth) masks.

Forehead supports according to the invention can also be used with facial masks in which the gas supply connector 16 is incorporated into the mask in the general position of the extension 12. In this type of mask, the supplied gas flows through or past the forehead support 12.

The mask 14 includes a pair of slotted connectors 20 to which are respectively connected ends of a lower head strap (not shown) for securing the nasal mask to the wearer's head.

10

15

20

25

30

35

The forehead support 10 includes a pair of arms 22 pivotally mounted to each other adjacent the extension 12. Each of the arms 22 includes a slotted connector 23 to which ends of an upper head strap 25 are respectively connected (see Figs. 3 to 6).

The arms 22 each include a cylindrical recess 24 which receives a cylindrical boss 26 provided on the extension 12. As best shown in Figs. 2 to 6, the cylindrical recess 24 and boss 26 allow the arms 22 to pivot relative to each other, and the extension 12 (and thus the mask 14), about axis 28. These figures also show the forehead support cushions 30 that are mounted at the ends of each of the arms 22. Examples of cushions 30 include solid foam sponges, silicone, stuffed pads, dual durometer foams, single pads or multiple pads joined together. The cushions 30 can be integrally moulded with the arms 22 or attached thereto by clips or adhesives or the like.

Also as shown in Figs. 2 to 6, the right hand side arm 22 (shown on the left hand side as Figs. 2 to 6 are underside views) includes a flexible member 32 which has a tongue 34 on its distal end. The member 32 has a first part 36 and a second part 38 which are bridged by a brace 40. The left hand side arm includes a generally arcuate shaped boss 41 having four grooves 42. It will be appreciated that four grooves is merely preferable and that only two or more grooves are required. It will also be appreciated that the flexible member 32 can be on the left hand side arm 22 and the boss 41 can be on the right hand side arm 22.

The arms are constructed from a plastics material, such as polycarbonate, which allows the member 32, when pressed in the general direction of arrow 43, to be flexed relative to the arm 22 upon which it is mounted to release the tongue 34 from engagement from one of the grooves 42 to allow angular adjustment between the arms 22. Releasing the member 32 biases the tongue 34 towards the grooves 42. When the tongue 34 and one of the grooves 42 are aligned, as is shown in Figs. 3 to 6, the tongue 34 engages one

PCT/AU00/00260

5

10

15

20

25

30

of the grooves 42. When the tongue 34 is engaged with one of the grooves, the arms 22 are locked against pivotal movement therebetween at a predetermined angle.

-6-

The tongue 34 has a radiused leading corner 35 and a similar radius is provided on the corresponding corner 37 of each of the grooves. The leading corner 35 and corresponding corners 37 can also be angled. When the arms 22 are pushed towards each other in a direction reducing the angle therebetween, the corner 35 causes the tongue 34 to ride up out of engagement with the slot and fall into engagement with the next slot. This allows the angle between the arms 22 to be quickly adjusted in a ratchet type fashion.

Figs. 3 to 6 respectively show the tongue 34 engaged in the first, second, third and fourth of the four grooves 42. These figures also show a forehead represented by line 44. The distance between the front of the forehead 44 and the axis 28 is indicated by the distance A. Figs. 3 to 6 show that the distance A increases or decreases as the angle between the arms 22 adjacent the forehead 44 is decreased or increased respectively.

The extension 12 of the nasal mask 14 is connected to the forehead support 10 generally in the region of the axis 28. Consequently, as the arms are pivoted towards each other the distance A is increased. This suits wearers with relatively high nasal regions and relatively low foreheads. Conversely, as the arms 22 are pivoted away from each other the distance A is decreased. This suits wearers with relatively low nasal regions and relatively high foreheads.

In this way the forehead support 10 advantageously allows the mask 14 to be positioned to comfortably suit the particular topography of the wearer's face by adjusting the angle of tilt of the mask 14 relative to the wearer's face. As examples, the position of arms 22 in Fig. 3 would be more suitable for use with a wearer having a protruding or bulbous forehead whilst the position of the arms 22 in Fig. 6 would be more suitable for use with a wearer having a shallow forehead or protruding cheeks or nose.

The curved shape of the cushions 30 allows them to effectively "roll" over the wearer's forehead during angular adjustment of the arms 22.

Further, as the arms 22 can also pivot relative to the mask 14, then the forehead support 10 is also able to better fit wearers whose foreheads are not symmetrical about the front-to-rear centreline of their head.

Further, the forehead support advantageously allows the angle between the arms to be adjusted using only one hand. The ease of adjustment of the arms also makes the forehead support particularly suitable for use by sick, weak or one-armed wearers.

WO 00/57942 PCT/AU00/00260

-7-

Figs. 7 to 13 shown a second embodiment of a forehead support 50 according to the present invention. Like reference numerals to those used in describing the first embodiment will be used to indicate like features in the second embodiment.

5

10

15

20

The forehead support 50 is similar to the forehead support 10 shown in Figs. 1 to 6 except the flexible member 32 is mounted to the right hand arm 22 and has a cantilever configuration. To increase resilience, the member 32 is bent back on itself into a U-shaped configuration to resiliently bias it against the boss 41 provided on the left arm 22. The member 32 also includes a protruding portion 54 which, when pressed in the general direction of arrow 56, causes the tongue 34 to move out of engagement with one of the grooves 42 to allow angular adjustment between the arms 22. Releasing the member 32 biases the tongue 34 towards the grooves 42. Engagement between the tongue 34 and one of the grooves 42 occurs when they are aligned.

Although the invention has been described with reference to a specific example, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.

As an example, the forehead support can include means to resiliently bias the arms relative to one another such that they increase or decrease their angle relative to one another when the tongue is disengaged from one of the slots. Also, in the embodiments described above the angle between the arms can be changed independently of the angle between the mask and the arms. However, in an alternative embodiment, the arms can be adapted to simultaneously change their relative angle, thereby maintaining a symmetrical position relative to the mask. Further, the tongue and grooves of the second embodiment can have the radiused corners of the first embodiment.

#### CLAIMS:

10

15

20

25


30


- 1. A forehead support for a respiratory mask, said forehead support including a pair of arms, wherein: the arms are each adapted to locate a forehead cushion; the arms are adapted to pivot relative to each other; and the arms are selectively lockable at two or more angular positions relative to each other.
- 2. The forehead support as claimed in claim 1, wherein the arms are also adapted to each pivot relative to the respiratory mask.
- 3. The forehead support as claimed in claim 1 or 2, wherein each of the arms include a cylindrical recess adapted to pivotally receive a cylindrical boss provided on the respiratory mask.
- 4. The forehead support as claimed in any one of the preceding claims, wherein one of the arms includes a tongue adapted to be received in one of at least two grooves provided on the other of the arms so as to lock the arms at one of two or more predetermined said angular positions.
- 5. The forehead support as claimed in claim 4, wherein the tongue is provided on a flexible member which is adapted to permit the tongue be moved out of engagement with the grooves by manual manipulation of the member.
- 6. The forehead support as claimed in any one of the preceding claims, wherein the forehead cushions are located on the outer ends of the arms.
- 7. The forehead support as claimed in any one of the preceding claims, wherein the arms also include means to connect a head strap thereto.
- 8. A respiratory mask assembly comprising a respiratory mask and a forehead support, said forehead support including a pair of arms, wherein: the arms are each adapted to locate a forehead cushion; the arms are adapted to pivot relative to each other; and the arms are selectively lockable at two or more predetermined angular positions relative to each other.
- 9. The respiratory mask assembly as claimed in claim 8, wherein the arms are also adapted to each pivot relative to the respiratory mask.
- 10. The respiratory mask assembly as claimed in claim 8 or 9, wherein each of the arms include a cylindrical recess adapted to pivotally receive a cylindrical boss provided on the respiratory mask.
- 11. The respiratory mask assembly as claimed in claim 10, wherein the respiratory mask includes an extension adjacent and above, in use, the wearer's nose on which the cylindrical boss is provided.

5

10

- 12. The respiratory mask assembly as claimed in any one of claims 8 to 11, wherein the one of the arms includes a tongue adapted to be received in one of at least two grooves provided on the other of the arms so as to lock the arms at one of two or more predetermined said angular positions.
- 13. The respiratory mask assembly as claimed in claim 12, wherein the tongue is provided on a flexible member which is adapted to permit the tongue be moved out of engagement with the grooves by manual manipulation of the member.
- 14. The respiratory mask assembly as claimed in any one of claims 8 to 13, wherein the forehead cushions are located on the outer ends of the arms.
- 15. The respiratory mask assembly as claimed in any one of claims 8 to 14, wherein the arms also include means to connect a head strap thereto.
- 16. The respiratory mask assembly as claimed in any one of claims 8 to 15, wherein the respiratory mask includes means to connect a head strap thereto.

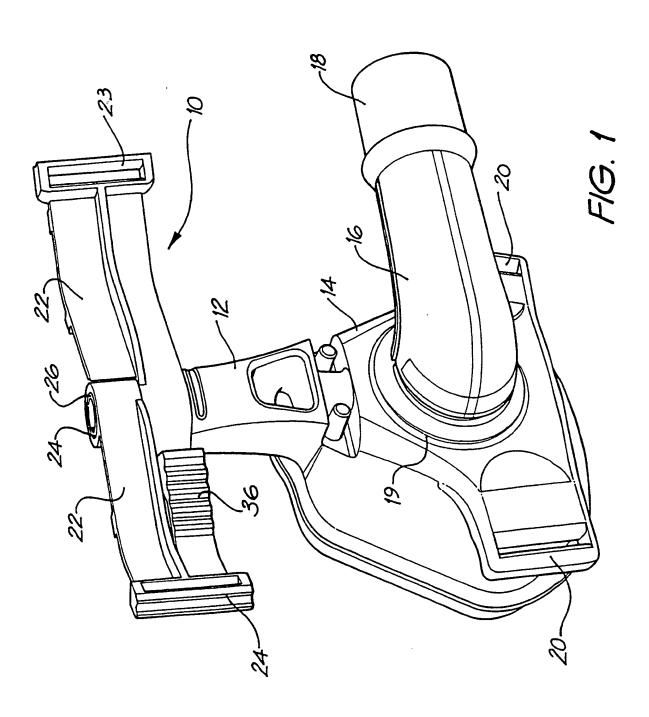

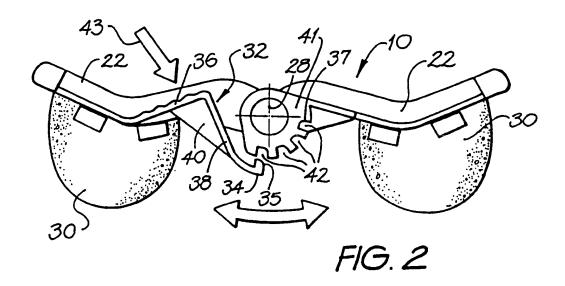

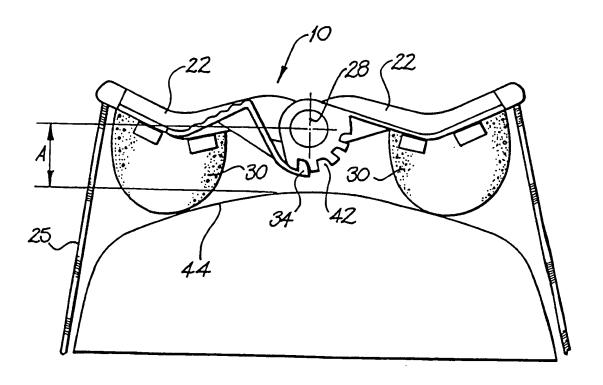


FIG. 3

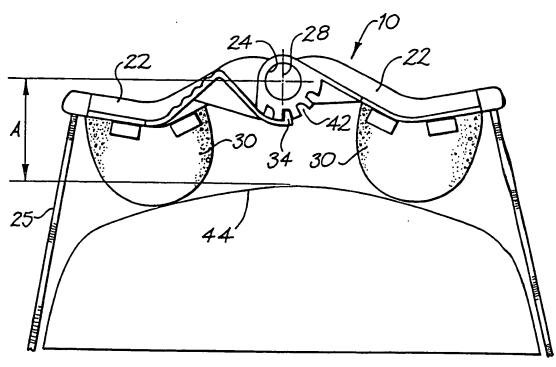


FIG. 4

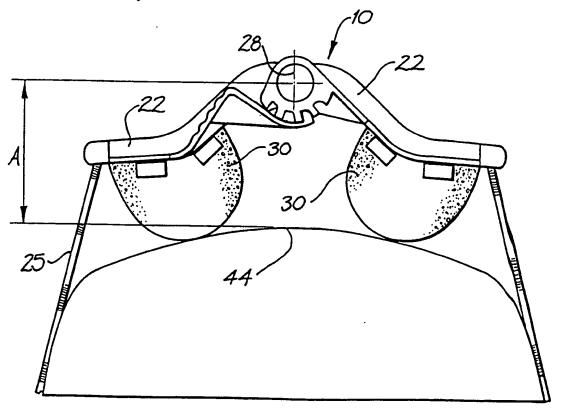


FIG. 5





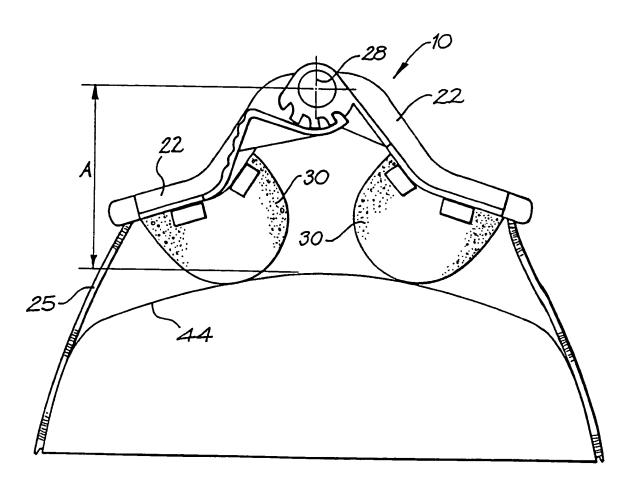



FIG. 6

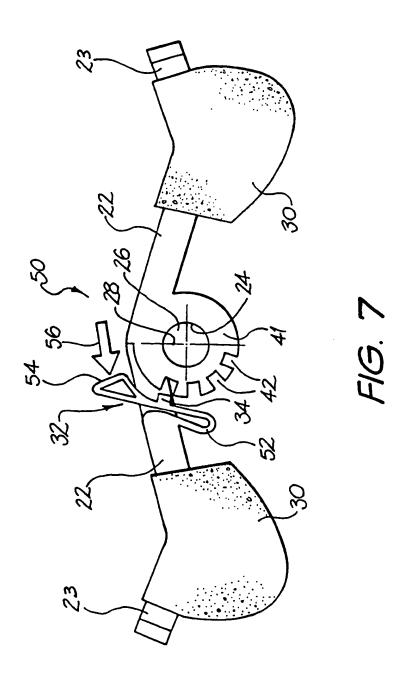


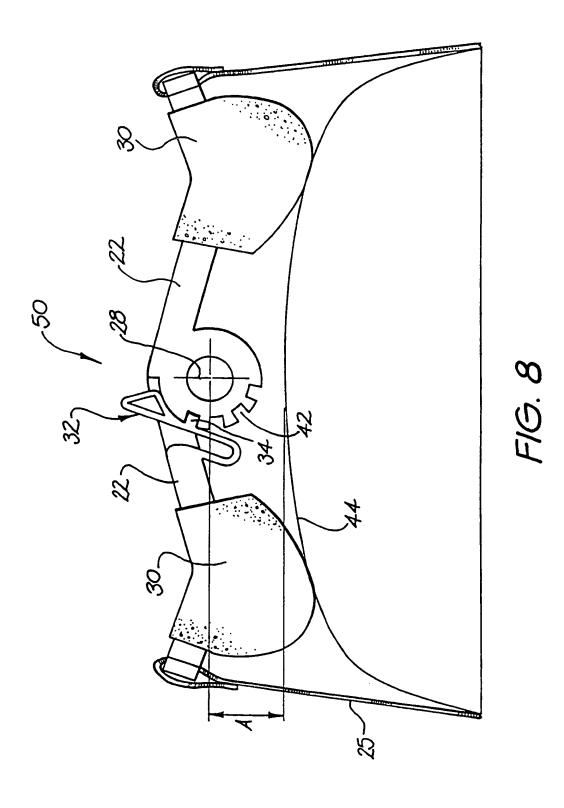


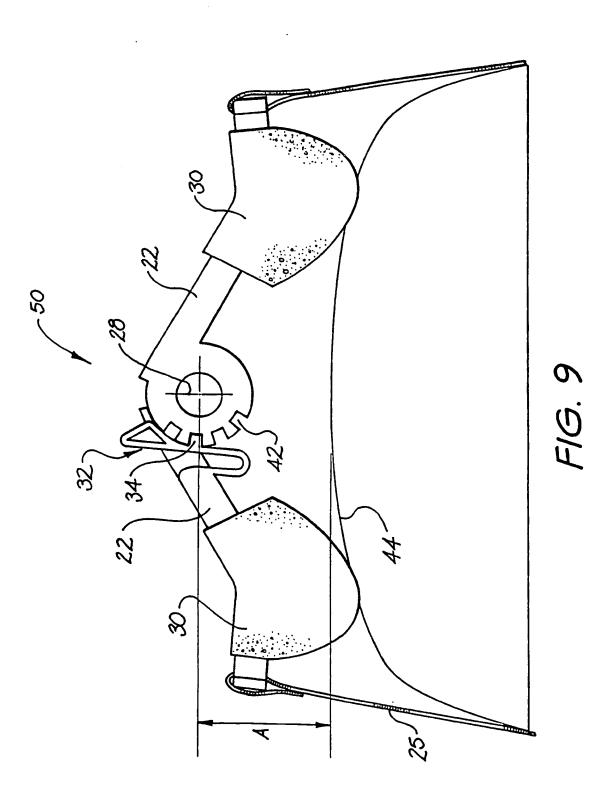

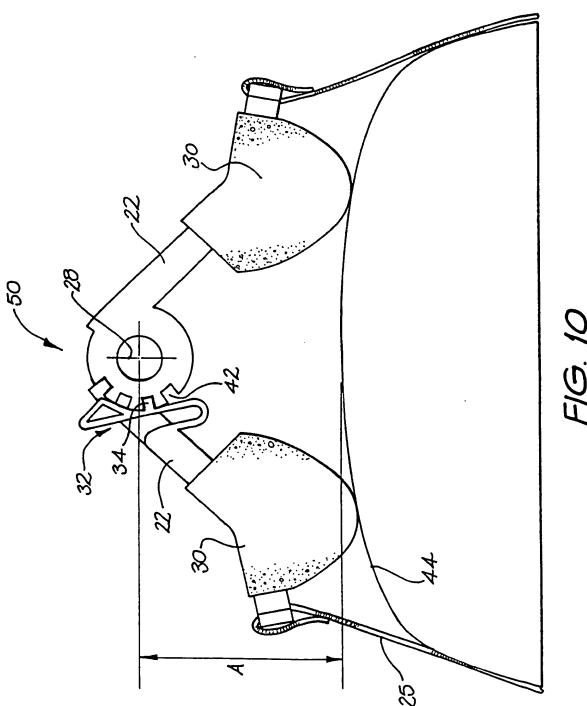

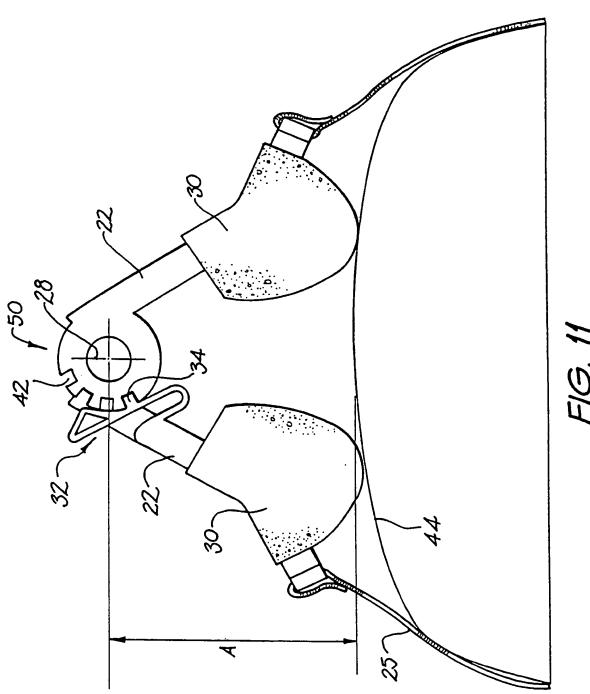

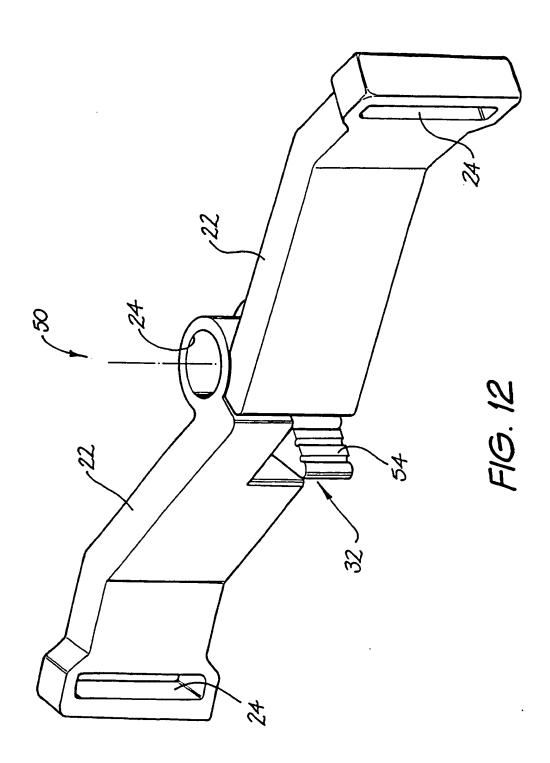

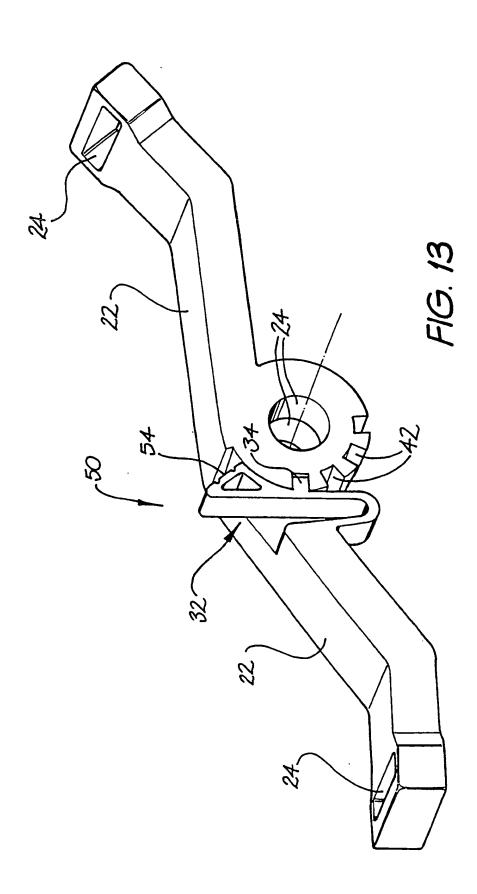

### INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU00/00260

Α.	CLASSIFICATION OF SUBJECT MATTER		
Int. Cl. 7	A61M 16/06, A61B 9/00, 18/08		
According to l	International Patent Classification (IPC) or to both	national classification and IPC	
	FIELDS SEARCHED		
Minimum docu	mentation searched (classification system followed by c	lassification symbols)	
Documentation AU: IPC A61	searched other than minimum documentation to the ext	ent that such documents are included in t	he fields searched
Electronic data WPAT	base consulted during the international search (name of	data base and, where practicable, search	terms used)
C.	DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where app	propriate, of the relevant passages	Relevant to claim No.
A	WO 98/24499 (RESMED LIMITED) 11 Jun	e 1998	
A	US 4,919,128 A (KOPALA et al) 24 April 19	990	
A	US 5,220,699 A (FARRIS) 22 June 1993 See column 4 line 60 to column 5 line 6.		
	Further documents are listed in the continuation	on of Box C X See patent fam	nily annex
"A" document come in the interest of the inter	al categories of cited documents:  nent defining the general state of the art which is insidered to be of particular relevance rapplication or patent but published on or after ternational filing date ment which may throw doubts on priority claim(s) ich is cited to establish the publication date of er citation or other special reason (as specified) ment referring to an oral disclosure, use, ition or other means ment published prior to the international filing wit later than the priority date claimed	priority date and not in conflict with understand the principle or theory understand the principle or theory understand the principle or theory understand to particular relevance; the considered novel or cannot be conventive step when the document is document of particular relevance; the considered to involve an inventive combined with one or more other structure to a period document member of the same pater.	n the application but cited to inderlying the invention are claimed invention cannot insidered to involve an staken alone are claimed invention cannot we step when the document is ach documents, such son skilled in the art ant family.
Date of the act	ual completion of the international search	Date of mailing of the international see	MAY 2000
	00 ling address of the ISA/AU I PATENT OFFICE	Authorized officer	3
PO BOX 200, E-mail address	WODEN ACT 2606, AUSTRALIA  :: pct@ipaustralia.gov.au (02) 6285 3929	BRENDAN BOURKE Telephone No: (02) 6283 2148	

# INTERNATIONAL SEARCH REPORT Information on patent family members

International application No. PCT/AU00/00260

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

atent Document Cited in Search Report			Patent Family Member				
wo	9824499	AU	46836/97	AU	51114/98		
US	919128/4	AU	42247/89	CA	1328207	US	4919128
		wo	9001963	US	5042478		
US	5220699	EP	634902	wo	9402053		